



LED Tube Lighting Pty. Ltd.

ACN 163 405 810

Supplier number E2183

Head Office:
47 Alexandra Rd
Ascot Qld 4007

T: (07) 3040 0331
E: info@ledtubelighting.com.au
W: www.ledtubelighting.com.au

Specification Sheet

Movement Sensor T8 LED Tube – PIR Adjustable



Features

- Fully adjustable brightness
- Fully adjustable trigger time
- Sensor distance 5-7m
- High efficiency >95lm/watt
- Rotating G13 ends
- Aluminum construction
- No flicker, instant start.
- Safety LED Fuse included
- Suitable for indoor use only
- 2 Year Warranty
- RCM

Technical Specifications

| | | |
|-----------------------------|------------------------|-------------------------------|
| Model | LEDTL-YG601886 | |
| PIR Sensor | Distance | 5-7meters |
| | Duration | Fully adjustable 5s -1 hour |
| | Untriggered brightness | Fully adjustable 0-40% |
| Electrical Data | Input Voltage | 100-265volt |
| | Input Power | 18w |
| End Cap | G13 | Rotating |
| Light Technical Data | luminosity | 1800lm (milky cover) |
| | Beam Angle | 120° |
| | Colour Temp | 4000k-4500k or 5500k-6000k |
| | CRI | >80 |
| | Dimmable | No |
| | Ta | -10°C to +40°C |
| | Power Factor | >.90 |



LED Tube Lighting Pty. Ltd.

ACN 163 405 810

Supplier number E2183

Head Office:
47 Alexandra Rd
Ascot Qld 4007


T: (07) 3040 0331
E: info@ledtubelighting.com.au
W: www.ledtubelighting.com.au

| Dimensions | Length |
|------------|--------|
| | 1200mm |

Also available in

- clear and striped cover
- 1500mm, 900mm and custom lengths

Fitting Instructions

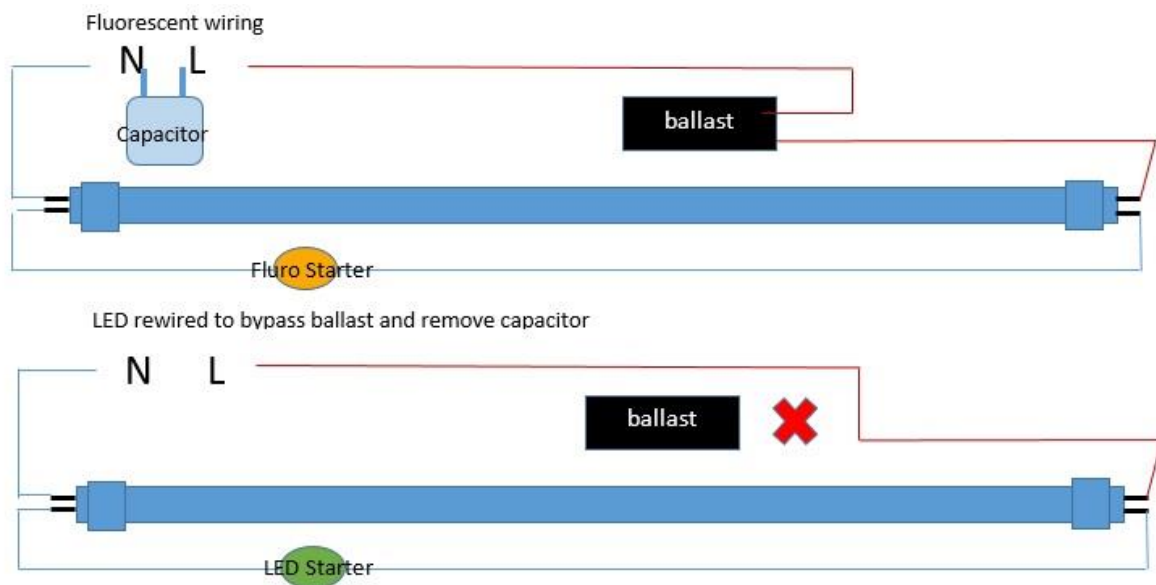

For a full instruction sheet on why and how to remove a capacitor and bypass a ballast please call 07 30400331 or email info@ledtubelighting.com.au.

Please ensure that all electrical rewiring is conducted by a qualified electrician.